



LR2 Phecda R

Linear Recessed Light

2" Wide | 679 lumen/ft | 8W/ft

Specification Sheet

Project Name :

Location :

Quantity :

Date :

Note :




Feature

The minimalist linear recessed design of Line collection offers a contemporary appeal and a pleasant ambient light. It is available in surface mount, Wall mount or suspended versions. The acrylic diffuser, enclosed in an extruded aluminum housing, evenly distributes the light and totally eliminates bright dots. The Line comes in a range of sizes from 4 feet and 8 feet to adapt to various ceiling areas.

Specification

- **CRI:** 90+
- **Beam Angle:** 97°
- **IP Grade:** IP40
- **Power:** 8W/ft
- **Lumen:** 640~679lm/ft
- **Efficiency:** 80~88lm/W
- **Dimming:** ELV/0-10V
- **Dimming Range:** 1~100%
- **Operating Temperature:** -20°C ~ +45°C
- **Certification:** cETLus
- **Warranty:** 5 years

Size

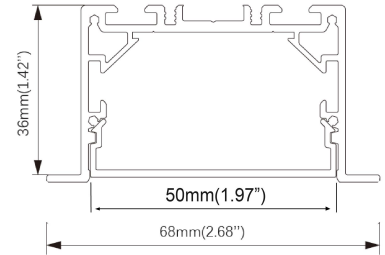

Order Information



Example: LR2.5-4-30K-BK-E-EMC

Model	Length	Color Temperature	Finish	Dimming	Options
LR2					
Linear Recessed Light	4 - 4 Feet 6 - 6 feet 8 - 8 feet C - Custom	30K - 3000K 35K - 3500K 40K - 4000K	BK - Black WH - White SL - Silver	E - ELV/Triac Dimming V - 0-10V Dimming	EMC - Emergency Driver


Performance

Size	CCT	Power[W]	Lumen[lm]
4ft	3000K	32	2560
	3500K	32	2638
	4000K	32	2715
6ft	3000K	46	3840
	3500K	46	3955
	4000K	46	4070
8ft	3000K	62	5120
	3500K	62	5275
	4000K	62	5430

Photometric Data



Installation Accessories



- N Shape clip



R5536-BI



- Rubber sucker




L-DA-A

Cut Out


Length	Width
4' 3/8" (1229mm)	2 3/8" (60mm)
8' 3/8" (2448mm)	2 3/8" (60mm)

Installation step


- (1) Drill installation holes and wiring hole as per scale by "L".

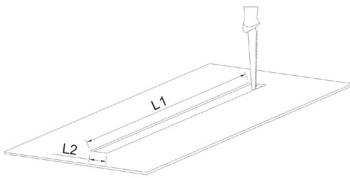

- (2) Remove diffuser, and then install N shape clips.

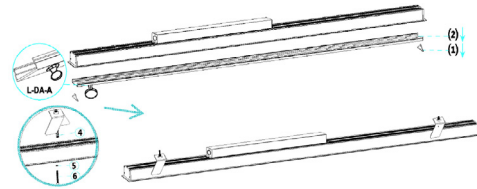


- (3) Connect the lamp input line in outlet box according to the color mark corresponding to the city electricity and dimming signal line, strain relief device need to be used before cord entry the outlet box during installation.

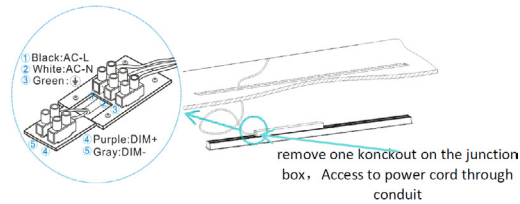


Explain: connect to 1, 2, 3 only if do not need to use dimming function, no need to connect 4, 5.

- (4) Fasten lighting fixture in the slot.

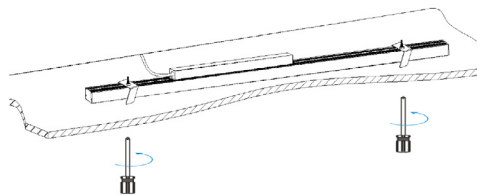

- (5) Assemble diffuser and anti-lightleak clips.

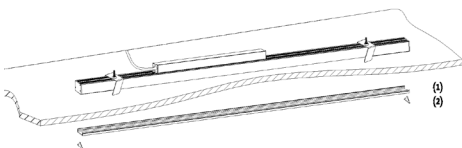

- (6) Complete installation.

