

Echo - 2" Recessed Spot Light



PROJECT: _____

Type: _____



Product Description

The CorePix Recessed Spot Light offers a refined, low-profile 2" recessed form with hidden adjustability, delivering focused light with minimal visual intrusion. Its deep regressed optic and quiet ceiling integration make it ideal for modern spaces that demand precision without distraction.

Features:

- Ultra-compact 2" aperture for clean ceiling integration
- Hidden tilt mechanism (up to 30°) with fixed rotation
- Deep regressed optic for low-glare visual comfort
- Multiple beam angles and CCTs for design flexibility
- Minimal trim aesthetic with optional trimless kit
- High-efficiency COB with tight color binning
- Available with TRIAC, ELV, or 0-10V dimming
- Passive thermal management with die-cast housing
- Designed for high-end retail, hospitality, and galleries

Specifications

Input Voltage: 120-277Vac, 50-60Hz
Power Consumption: 10W
Delivered lumen: 927lm@4000K
CRI(Ra): >90min
R9: >70 min
Dimming: TRIAC, ELV or 0-10V
Power Factor: >0.9
Lumen Maintenance: 70% @ 60,000 Hrs
Approved location: IP20, Dry
Tilt : 50°
THD <20%
Certification: cETLus

Critical Dimensions

Cut Out: 2.12" (60mm)
Outer Diameter: 2.68" (68mm)
Ceiling Clearance: 3.15" (90mm)

Ordering Guide

Product	Driver Output	Light Source	Beam Spread	Trim	Spot finish	Installation
S23	10E-10W TRIAC/ELV 10V-10W 0-10V	40 - 4000K, CRI>90 35 - 3500K, CRI>90 30 - 3000K, CRI>90 27 - 2700K, CRI>90	NS - 15° Narrow Spot SP - 25°Spot FD - 35°Flood	WH - White Flange BK - Black Flange TR - Plaster Trimless C - Custom	WH - White BK - Black C - Custom	RM - Remodel RP - Rough-in Plate NCP- New Construction Non IC

Example:SG-S21-15E-30T-SP-WH-WH-RM



Assembled in
Canada


Specifications and product details provided in this document are subject to change without notice. All product performance values are typical and may vary slightly. Vyyd Lighting assumes no liability for damages or loss resulting from the use of this information. It is the responsibility of the user to verify all data and ensure suitability for the specific application.

Echo - 2" Recessed Spot Light




PROJECT: _____ Type: _____

Dimensions

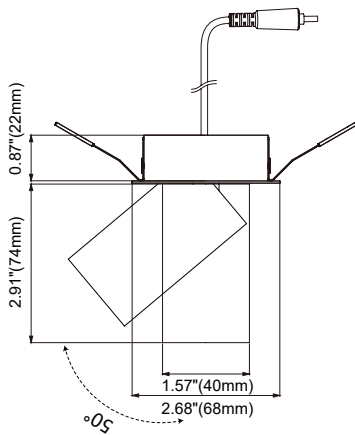

Flange

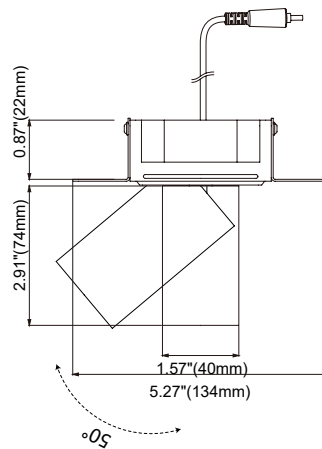


Plaster Trimless

Lumens: Tested with 10W 4000K


Beam angle:	Delivered Lumens:
Narrow Spot 16°	580lm
Spot 25°	790lm
Flood 35°	927lm

NCP- New Construction Non IC

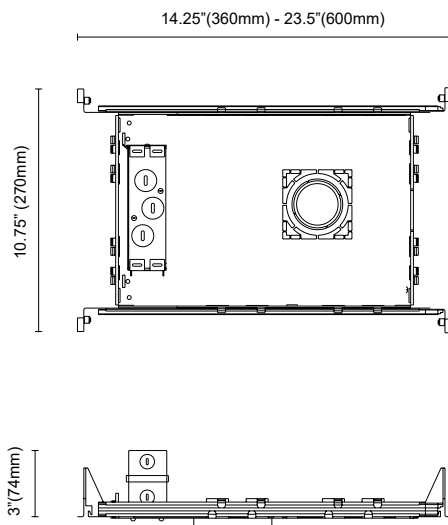

Cut Out Size:
 Square 3" (77mm)
 Round 3" (77mm)
 Round 2" (62mm) < for SG-S21
 Round 1" (55mm)

RP - Rough-in Plate

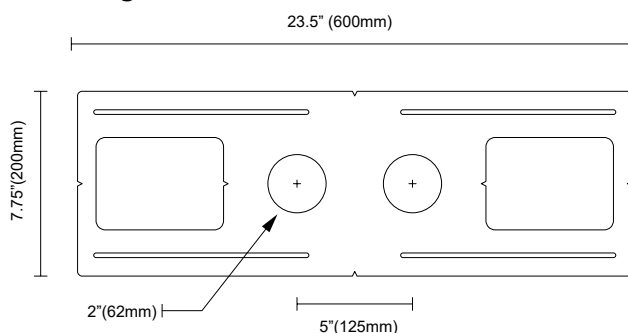

Specifications and product details provided in this document are subject to change without notice. All product performance values are typical and may vary slightly. Vyyd Lighting assumes no liability for damages or loss resulting from the use of this information. It is the responsibility of the user to verify all data and ensure suitability for the specific application.