




LR1.5 Phecda R

Linear Recessed Light

1.5" Wide | 441 lumen/ft | 6W/ft

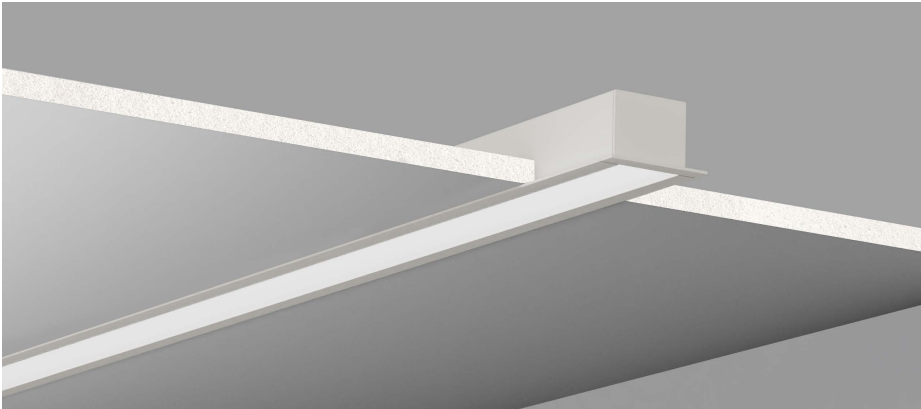

Specification Sheet

Project Name :

Location :

Quantity :

Date :

Note :


Feature

The minimalist linear recessed design of Line collection offers a contemporary appeal and a pleasant ambient light. It is available in surface mount, Wall mount or suspended versions. The acrylic diffuser, enclosed in an extruded aluminum housing, evenly distributes the light and totally eliminates bright dots. The Line comes in a range of sizes from 4 feet and 8 feet to adapt to various ceiling areas.

Specification

- **CRI:** 90+
- **Beam Angle:** 93°
- **IP Grade:** IP40
- **Power:** 6W/ft
- **Lumen:** 415~441lm/ft
- **Efficiency:** 73~75lm/W
- **Dimming:** ELV/0-10V
- **Dimming Range::** 1~100%
- **Operating Temperature:** -20°C ~ +45°C
- **Certification:** cETLus
- **Warranty:** 5 years

Size



Order Information



Example: LR1.5-4-30K-BK-E-EMC

Model	Length	Color Temperature	Finish	Dimming	Options
LR1.5					
Linear Recessed Light	4 - 4 Feet 6 - 6 feet 8 - 8 feet C - Custom	30K - 3000K 35K - 3500K 40K - 4000K	BK - Black WH - White SL - Silver	E - ELV/Triac Dimming V - 0-10V Dimming	EMC - Emergency Driver

Performance


Size	CCT	Power[W]	Lumen[lm]
4ft	3000K	23	1665
	3500K	23	1715
	4000K	23	1765
6ft	3000K	35	2500
	3500K	35	2573
	4000K	35	2645
8ft	3000K	47	3330
	3500K	47	3430
	4000K	47	3530

Photometric Data



LR1.5 Linear Recessed Light

Installation Accessories

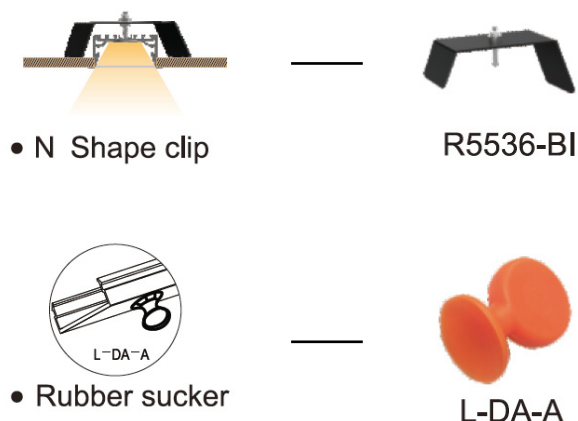


Cut Out


Length	Width
4' 3/8" (1229mm)	1 7/8" (47mm)
8' 3/8" (2448mm)	1 7/8" (47mm)

Installation step

(1) Drill installation holes and wiring hole as per scale by "L".

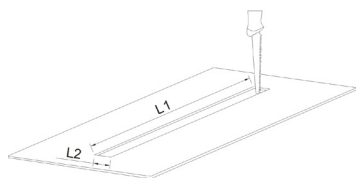


(3) Connect the lamp input line in outlet box according to the color mark corresponding to the city electricity and dimming signal line, strain relief device need to be used before cord entry the outlet box during installation.

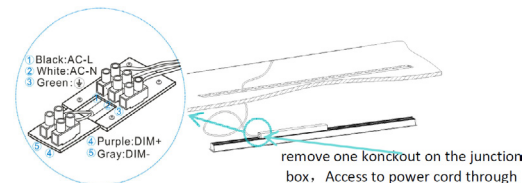


Explain: connect to 1, 2, 3 only if do not need to use dimming function, no need to connect 4, 5.


(5) Assemble diffuser and anti-lightleak clips.

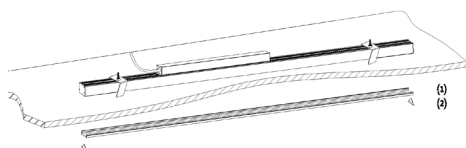

(2) Remove diffuser, and then install N shape clips.

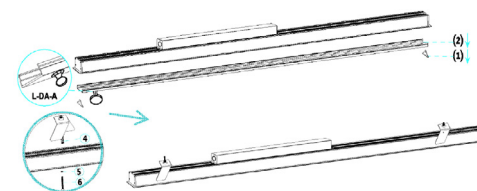

(4) Fasten lighting fixture in the slot.

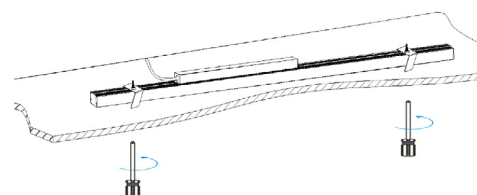

(6) Complete installation.

