




## Features

- Field selectable colour temperature  
2700K, 3000K, 3500K, 4000K, 5000K
- Powder coated aluminum trim
- Acrylic lens
- Foam gasket for air tight applications.
- Class II isolated LED driver
- ROH compliant

## Color Performance

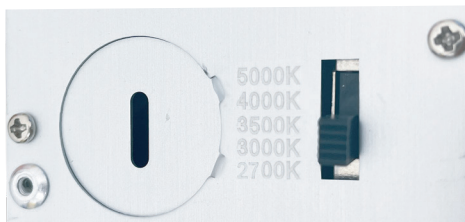

## Specifications

**Wattage:** 12W

**Voltage:** 120 VAC

**Lumen Output:** 810lm

**Colour Temperature:** 5 CCT Selectable  
2700K/3000K/3500K/4000K/5000K

**IP Rating:** IP44 Wet Locations

**Beam Angle:** 40°

**Aiming Adjustability:** Tilt ±20°

**Rated Life Span:** 50,000 hrs

**Operation Temp:** -20°C to 40°C

**Dimming Types:** Triac/ELV Dimmers

**IC Rated:** Yes

**Air Tight:** Yes

**Safety Listing:** cETLus

**Warranty:** Two years Standard

## Dimensions

