




Features

- Field selectable colour temperature 2000K, 3000K or 4000K
- Tilt 30° and rotate 360° for precise aiming
- Integrated steel driver/junction box
- Powder coated aluminum trim
- Acrylic diffuser
- Foam gasket for air tight applications.
- Low profile suitable for installation in low plenum.


Color Performance

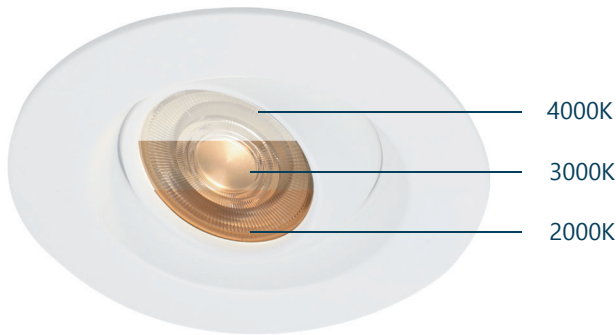

CRI 90+



Dimensions

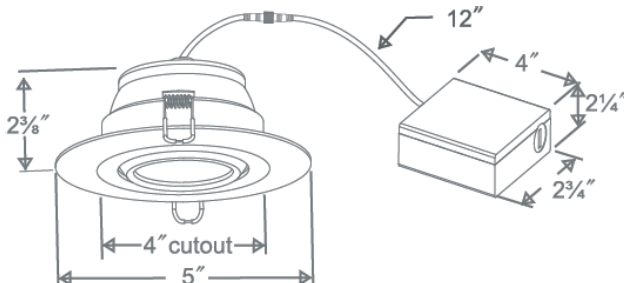

Specifications

Wattage: 10W

Voltage: 120 VAC

Lumen Output: 855lm

Colour Temperature: Field Selectable
2200K/3000K/4000K

CRI: >90%

IP Rating: IP44 Wet Locations

Beam Angle: 36°

Aiming Adjustability: Tilt ±30°, Rotate 360°

Rated Life Span: 50,000 hrs

Operation Temp.: -20°C to 50°C

Dimming Types: Triac/ELV Dimmers

IC Rated: Yes

Air Tight: Yes

Safety Listing: cETLus

Warranty: Two years Standard

