



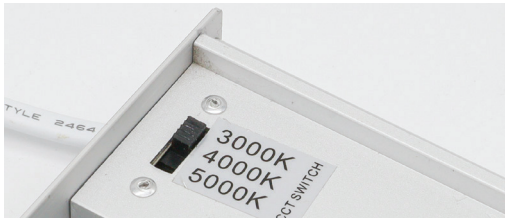

Features

- Field selectable colour temperature 3000K, 4000K or 5000K
- Powder coated aluminum trim
Acrylic diffuser
- Integrated steel driver/junction box
- Foam air tight gasket
- Class II isolated LED driver
- ROH compliant

Color Performance

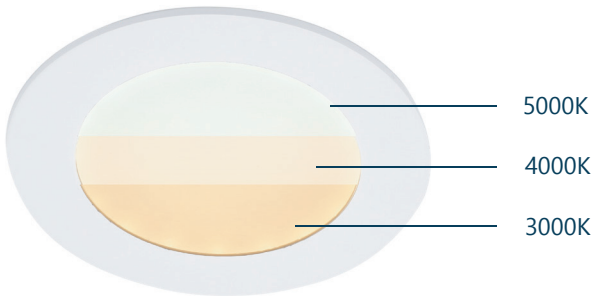

3CCT
Field Selectable

Specifications

Wattage: 9W

Voltage: 120 VAC

Lumen Output: 855lm

Colour Temperature: Field Selectable
3000K/4000K/5000K

IP Rating: IP44 Wet Locations

Beam Angle: 120°

Aiming Adjustability: None/Fixed

Rated Life Span: 50,000 hrs

Operation Temp.: -20°C to 50°C

Dimming Types: Triac/ELV Dimmers

IC Rated: Yes

Air Tight: Yes

Safety Listing: cETLus

Warranty: Two years Standard

Dimensions

