




# Side Bend Neon Strip

NS0410-S | 24VDC | IP65

3W/ft | 70lm/ft | Ra85+

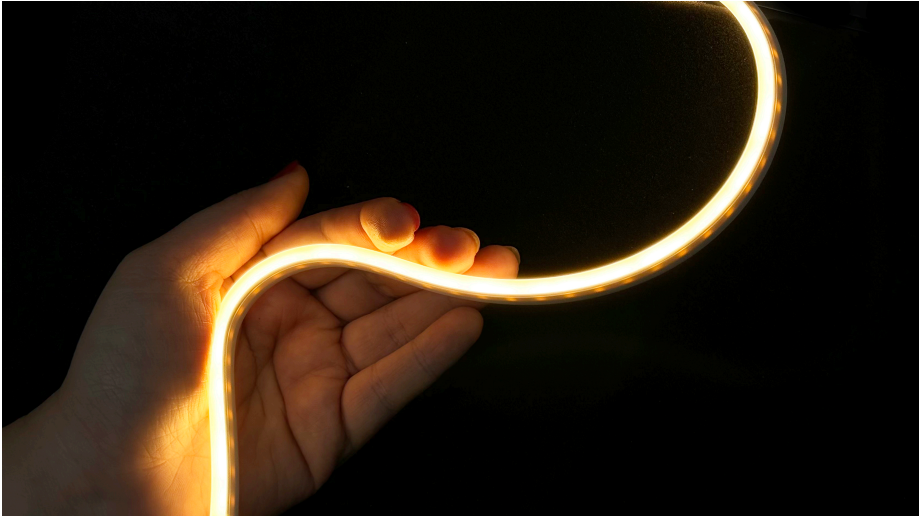

## Specification Sheet


Project Name :
Location :
Quantity :
Date :
Note :

### Order Information

Example: NSS0612-24V-30-5

Series	Voltage	Colour Temperature	Length
<b>NS0410-S</b>	<b>24V</b>		<b>5</b>
Side Bend Neon Strip	24VDC Input	<b>24</b> - 2400K <b>27</b> - 2700K <b>30</b> - 3000K <b>35</b> - 3500K <b>40</b> - 4000K	5 - 5m (197.05in)

### Dimension

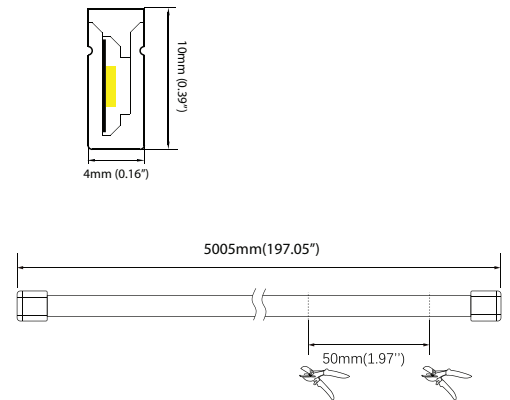


### Specifications

<b>Length Per Roll:</b>	5m (197.05in)	<b>Total Wattage:</b>	48W(5m)
<b>Input Power:</b>	24VDC	<b>Brightness</b>	229lm/m(70lm/ft)
<b>Rated Power:</b>	9.6W/m (2.93W/ft)	<b>Cutting Interval:</b>	50 mm
<b>CRI(Ra):</b>	85+	<b>Lumen Maintenance:</b>	70% @ 30,000 Hrs
<b>Light transmittance:</b>	19%	<b>Max Run:</b>	5m (16.44 ft)
<b>Beam Angle</b>	113°		



# NSS0410 Side Bend Neon Strip

## Photometric Data

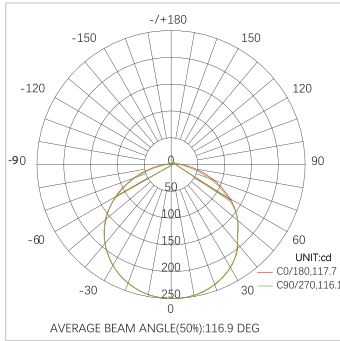

Remark: Output data is from test result of 4000K neon light : Tolerance +10%.

Flux out: 577.2lm

Height	Eavg,Emax	Angle:116.13deg	Diameter
1m	66.33,250.0lx		320.85cm
2m	16.58,62.49lx		641.69cm
3m	7.370,27.77lx		962.54cm
4m	4.146,15.62lx		1283.38cm
5m	2.653,9.999lx		1604.23cm
6m	1.843,6.944lx		1925.07cm
7m	1.354,5.101lx		2245.92cm
8m	1.036,3.906lx		2566.76cm
9m	0.8189,3.086lx		2887.61cm
10m	0.6633,2.500lx		3208.45cm


## Accessories




**End cap**  
NS0410-S-End Cap




**Power Feed End Cap**  
NS0410-S-Feed End Cap

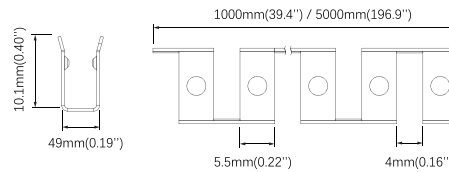

**Flexible Profile**  
NS0410-S-Flexible Profile

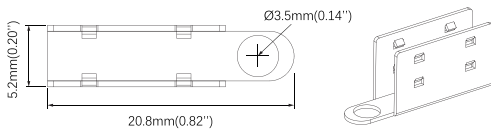


**Clip**  
NS0410-S-Clip




**Profile**  
NS0410-S-Profile

## Bending Program

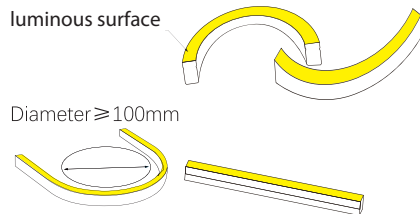

✓ Correct bending direction and bending radius



✗ Do not twist or bending reversely