



# Canister Pro Medium T376

Integrated COB LED Track Light

ELV Dimmable | 1000 lumen | 20W

## Specification Sheet

### Product Description

T376 has a classic canister design to meet the functional and the aesthetic requirements for display, accent and task lighting. The fixtures feature integral COB LED light source and TIR lenses that provides a wide choices of beam angles and shapes. The compact size is unobtrusive and can be easily concealed in recessed channels or coves.

### Order Information

Example: T376-12-25T-VN-H-B-62OV

Model <b>T376</b>	Power	Colour Quality	Beam Angle	Adaptor
Integrated LED track light fixture	7 - 7W 12 - 12W 20 - 20W	25T - 2500K, CRI>95 27T - 2700K, CRI>95 30T - 3000K, CRI>95 30C - 3000K, CRI>90 35T - 3500K, CRI>95 40C - 4000K, CRI>90	XN - Extra Narrow 6° VN - Very Narrow 11° NS - Narrow Spot 16° SP - Spot 22° FD - Flood 36° WF -Wide Flood 45°	H - Halo J - Juno L - Lightolier G - Global
Finish	Accessory			
B - Black W - White S - Silver	62OV - Oval Flood Filter 62BD - Barn Door 62SN - Snoot 62HC - Honeycomb Louvrer	62-24D - 24° Diffuser 62-40D - 40° Diffuser 62WW - Wall Wash Filter		

Project Name :

Location :

Quantity :

Date :

Note :

### Features

#### Light Engine:

High-performance D-COB (Driver and COB on board) LED module provides chromaticity consistency within a 3-step MacAdam Ellipse.

#### Optics:

Polycarbonate total internal reflection (TIR) lenses provide precise beam shapes with minimal glare and spill and light scallops.

#### Housing:

Electrostatically powder coated cold-forged engine grade high purity aluminum.

#### Solid State Driver:

The solid-state onboard linear driver IC eliminates the need for an electrolytic capacitor and thus increases the lifespan.

#### Mounting:

Available in "H", "J", "L" and "G" type connectors that allow for 345° rotation and 90° tilt.

### Specification

**CCT:** 2500K/2700K/3000K/3500K/4000K

**CRI:** >90/>95

**Dimming:** ELV

**Total lumen output max:** 2200 lm @ 20W

**Delivered lumen max:** 1650 lm @ 20W

**Track connector:** "H"/"J"/"L"/"G"

**Power consumption:** 12W/20W

**Power Factor:** >0.9

**Input Voltage:** 120V, 60Hz

**Approved Location:** IP20, Dry

**Lumen Maintenance:** 70% @ 60,000 Hrs

**Approved location:** IP20, Dry

**Tilt:** 90°

**Rotate:** 350°


**THD** <20%

**Certification:** cETLus




# Canister Pro Medium T376 Integrated COB LED Track Light

## Dimensions

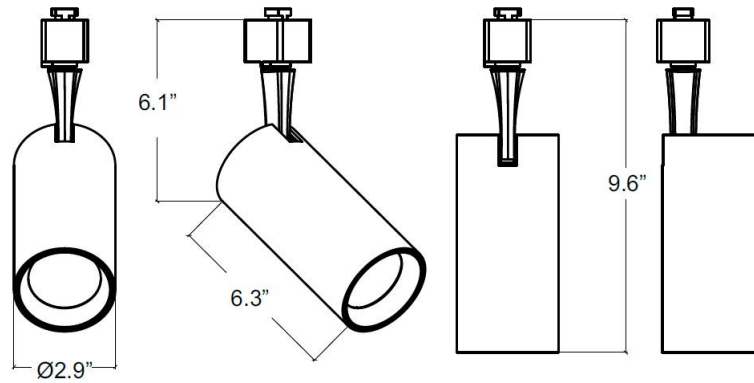


## Colorimetric Data


**25T.** CRI : 96.56

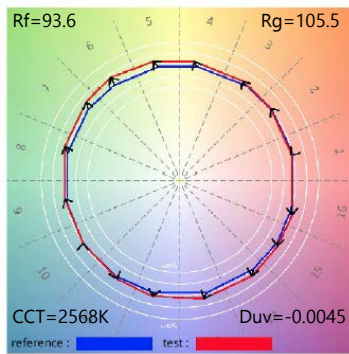


**27T.** CRI : 96.56

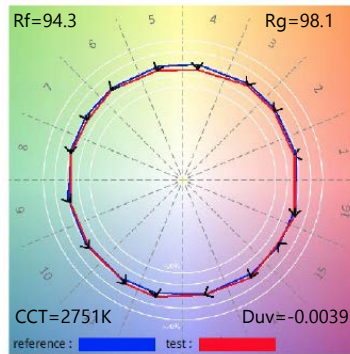


**30C.** CRI : 92.88

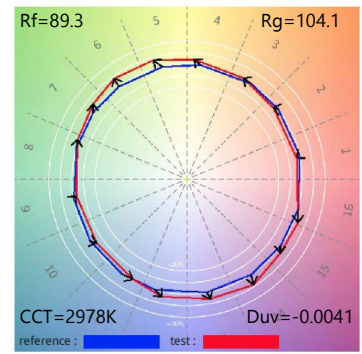


**30T.** CRI : 96.01

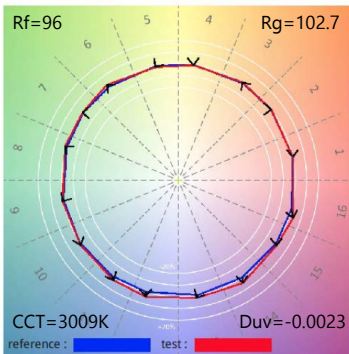

**35T.** CRI : 95.98

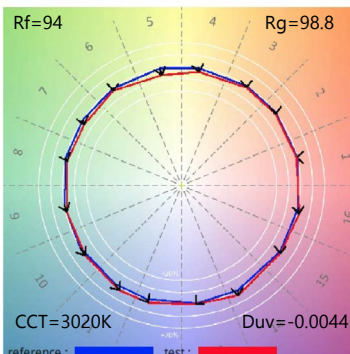

**40C.** CRI : 91.6

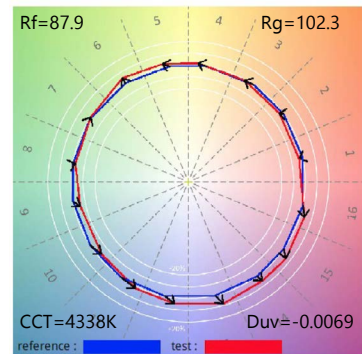

# Canister Pro Medium T376 Integrated COB LED Track Light

## Accessory



**62-WW**  
Wall Wash Filter



**62-40D**  
40° Diffuser



**62-24D**  
24° Diffuser



**62-SN**  
Snoot



**62-HC**  
Honeycomb Louvre



**62-BD**  
Barn Door



**62-OV**  
Oval Flood Filter

## Compatible Dimmers

Lutron®		Leviton®	Cooper®
CN-503P	NT603 WH	IPE04-LA	DLC03P
AYLV-600P-LA	MACL-153M	IPL06	DAL06P
DV-603P	SCL-153P	NO.6631	SLC03P
DV-600P	AYCL-153P	MDI06-1LW	
CTCL-153PD	GLS05-C2036	C20-6681-IW	
DVCL-153P	LISTED 6B38		
LG-600P	CN600P		
GL-603P			