




Features

- Field selectable colour temperature
2700K, 3000K, 3500K, 4000K, 5000K
- Powder coated aluminum trim
- Acrylic lense
- Foam gasket for air tight applications.
- Class II isolated LED driver
- ROH compliant

Color Performance

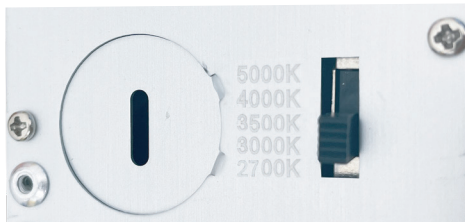

Specifications

Wattage: 12W

Voltage: 120 VAC

Lumen Output: 810lm

Colour Temperature: 5 CCT Selectable
2700K/3000K/3500K/4000K/5000K

IP Rating: IP44 Wet Locations

Beam Angle: 40°

Aiming Adjustability: Tilt ±20°

Rated Life Span: 50,000 hrs

Operation Temp: -20°C to 40°C

Dimming Types: Triac/ELV Dimmers

IC Rated: Yes

Air Tight: Yes

Safety Listing: cETLus

Warranty: Two years Standard

Dimensions

