



Phecda SD2.5

Linear Suspension Direct

2.5" Wide | 888lm/ft | 8.5W/ft

Specification Sheet

Project Name :
Location :
Quantity :
Date :
Note :




Feature

The minimalist linear design of Line collection offers a contemporary appeal and a pleasant ambient light. It is available in surface mount, Wall mount or suspended versions. The acrylic diffuser, enclosed in an extruded aluminum housing, evenly distributes the light and totally eliminates bright dots. The Line comes in a range of sizes from 4 feet and 8 feet to adapt to various ceiling areas.

Specification

- **CRI:** 90+
- **Beam Angle:** 96°
- **IP Grade:** IP40
- **Power:** 8.5W/ft
- **Lumen:** 838~888lm/ft
- **Efficiency:** 98.5~105lm/W
- **Dimming Range:** 0-10V / 1~100%
- **Voltage [V]:** AC100-277V / 50~60Hz
- **Operating Temperature:** -20°C ~ +45°C
- **Warranty:** 5 years

Size


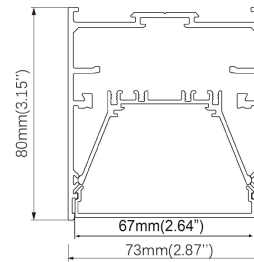


Order Information

Example: SD2.5-S-4-30K-BK-EMC

Model	Mounting	Length	colour	Finish	Options
SD2.5					
SD2.5 - 2.5" aperture	C - Ceiling mount S - Suspension W - Wall mount	4 - 4 Feet 6 - 6 Feet 8 - 8 Feet C - Custom	30K - 3000K 35K - 3500K 40K - 4000K	BK - Black WH - White SL - Silver	EMC - Emergency Driver

Photometric Data

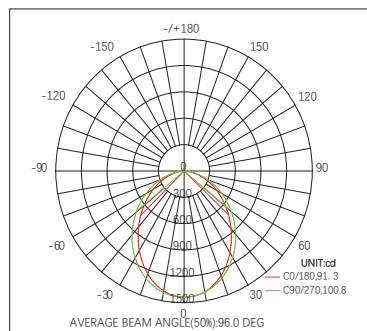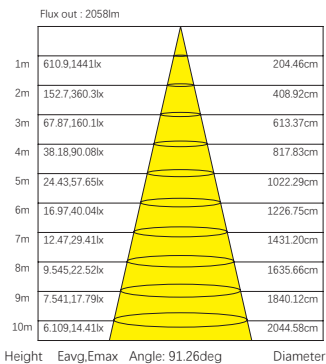


Performance

Size	CCT	Power[W]	Lumen[lm]
4ft	3000K	34	3350
	3500K	34	3450
	4000K	34	3550
6ft	3000K	51	5025
	3500K	51	5178
	4000K	51	5330
8ft	3000K	68	6700
	3500K	68	6903
	4000K	68	7105



Extension

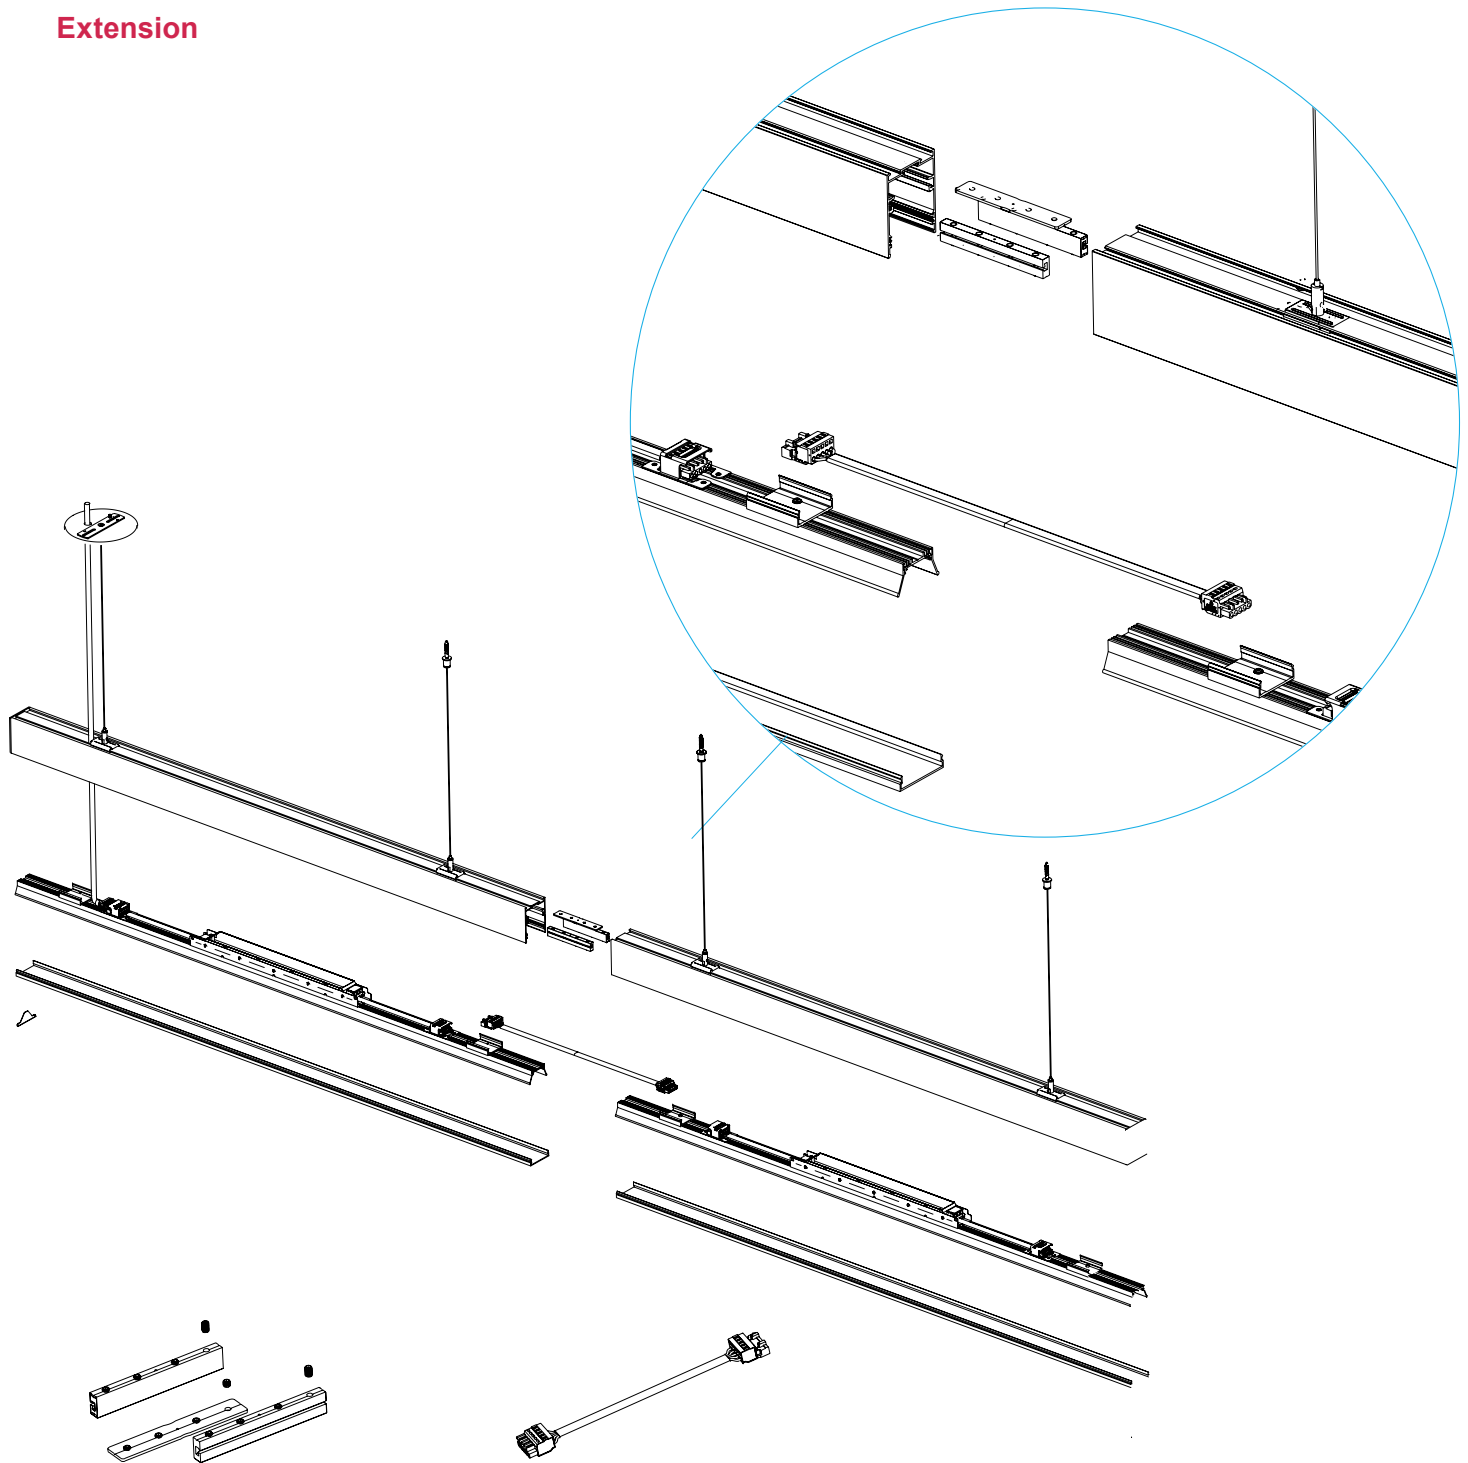

PC-01-180


Extension connector to connect profiles.

EX-CC-01


Extension connector to connect cables.

Phecda SD2.5 Linear Suspension Direct


Suspension System

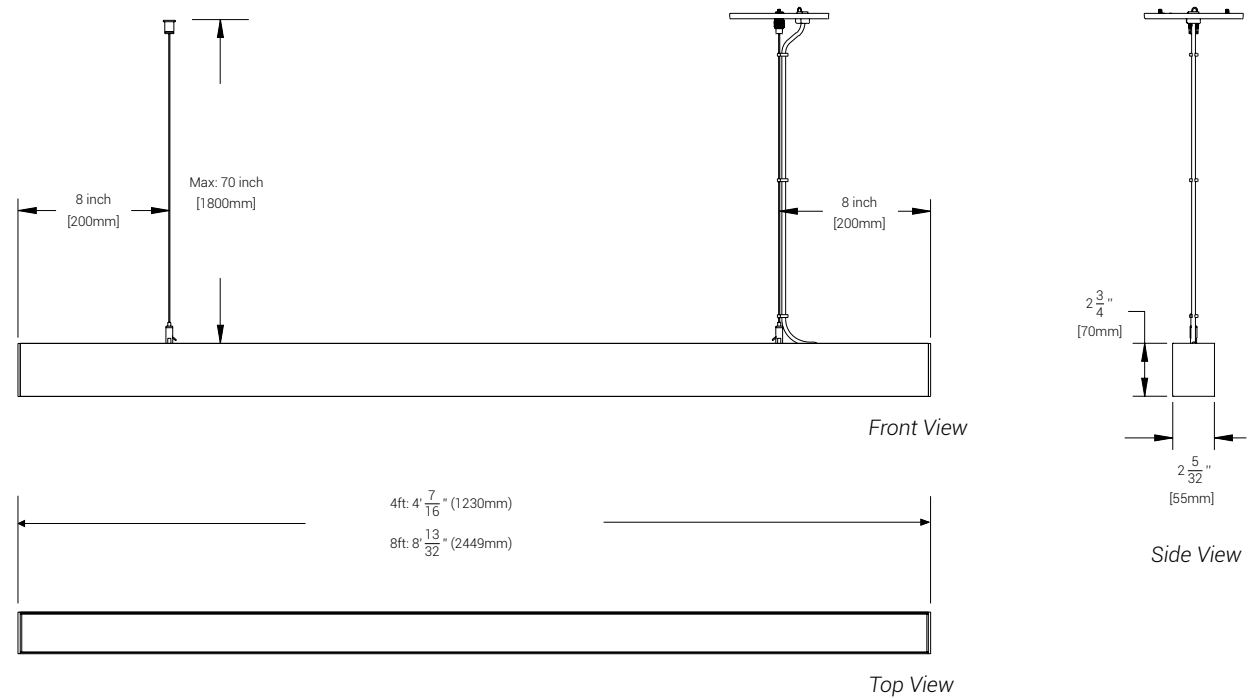

Suspension Accessories

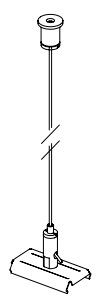


PW-NC-01
Pendant wire,
Non-power side,
with clips, 70 inches.




PW-PC-01
Pendant wire, Power
side, with clips, canopy.
70 inches.

Phecda SD2.5 Linear Suspension Direct

Wall Mount System

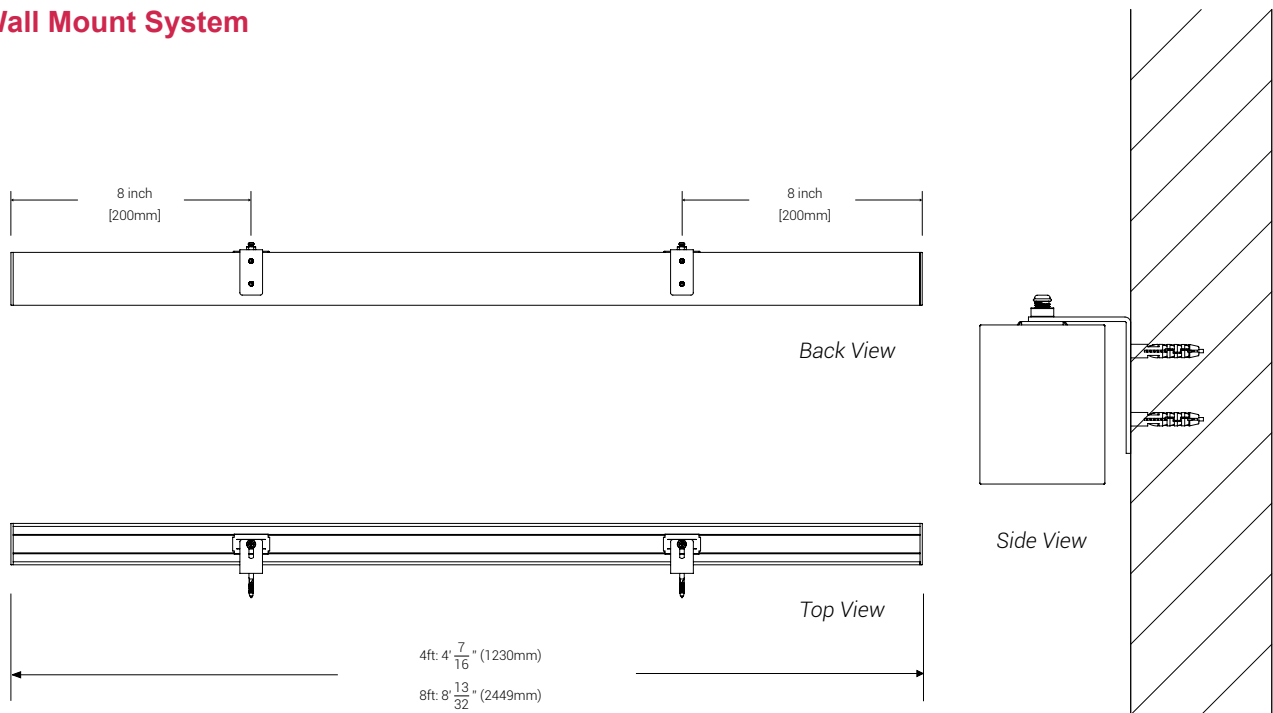

Wall Mount System



WL-CL-01

Wall mounted accessories, with clips to be attached on the fixture.