




Features

- Low glare deep baffle
- Five field selectable colour temperatures
- Tilt 20° and rotate 360° for precise aiming
- Integrated steel driver/junction box
- Powder coated aluminum trim
- Acrylic diffuser
- Silicon gasket for wet location applications.
- Suitable for wet locations

Color Performance

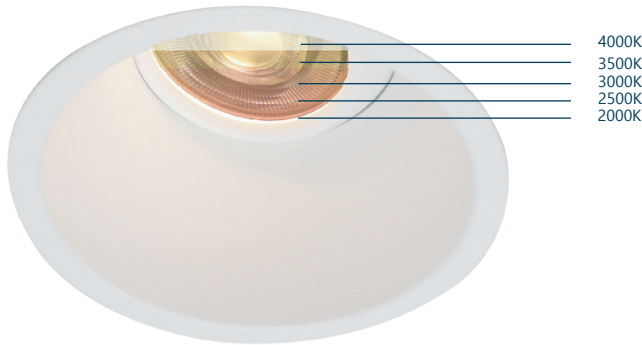

Specifications

Wattage: 10W

Voltage: 120 VAC

Lumen Output: 855lm

Colour Temperature: Field Selectable
2000K / 2500K / 3000K /
3500K / 4000K

CRI: >90%

IP Rating: IP44 Wet Locations

Beam Angle: 36°

Aiming Adjustability: Tilt ±20°, Rotate 360°

Rated Life Span: 50,000 hrs

Operation Temp.: -20°C to 50°C

Dimming Types: Triac/ELV Dimmers

IC Rated: Yes

Air Tight: Yes

Safety Listing: cETLus

Warranty: Two years Standard

Dimensions

