



FPL Series

Flat Panel Light

Selectable Power and CCT
Voltage input 120-347V

Description

FPL Series flat panel light provides high quality illumination at an affordable price. The large light emitting surface projects visually comfortable soft light. LPL offers maximum installation flexibility by featuring on-site selectable power, selectable colour temperature, and universal voltage input of 120V to 347V.

Order Information

Example: FPL-14-SW-S-3CCT-EB

Model FPL	Size	Power (Selectable) SW	Mounting type	CCT (Selectable) 3CCT
FPL	14-1'X4'	30W/ 3400lm 35W/ 3850lm 40W/ 4300lm	R- Recessed S- Suspended M- Surface Mounted	3500K 4000K 5000K
	22-2'X2'	30W/ 3400lm 35W/ 3850lm 40W/ 4300lm		
	24-2'X4'	30W/ 3400lm 40W/ 4400lm 50W/ 5400lm		

Options

EB- Emergency backup driver and battery

Specifications

- **Selectable Power Output:** 30-50W
 - **Input Voltage:** 120-347V
 - **Efficacy:** 110 LPW Nominal*
 - **CRI:** > 85
 - **Dimming Range:** 0-10V, 1%-100%,
 - **Selectable CCT:** 3500/4000/5000K
 - **Operating Temperature:** -20 to 40°C
 - **Power Factor:** > 0.95
 - **Beam angle:** 120°
 - **THD:** < 20%
 - **Listing:** cULus
 - **Qualification:** DLC
 - **Compliance:** CE, FCC, RoHS
- **Housing:** Aluminum
 - **Optics:** Frosted PMMA lens
 - **Location:** Indoor, IP54 rated
 - **Warranty:** 5 years**

* Efficacy varies with CCT and power output. The actual efficacy is ±8% of the nominal LPW

** Complete warranty items located at www.vyvydlighting.ca/warranty



Project Name :
Location :
Quantity :
Date :
Note :



FPL-14



FPL-22




FPL-24




FPL Series Flat Panel Light


Dimensions

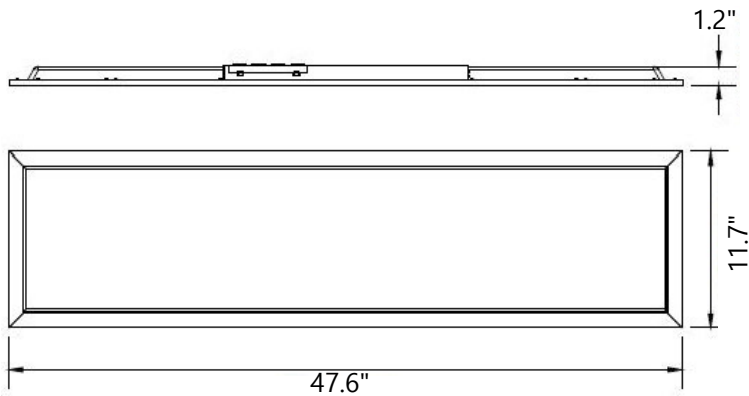

FPL-14

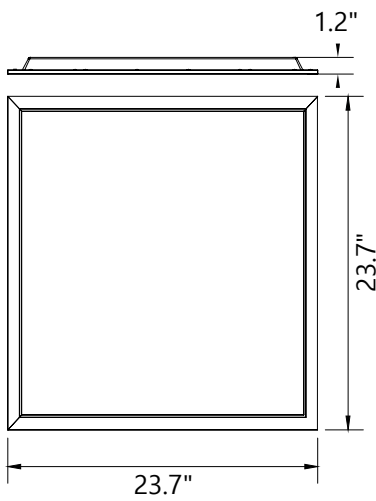

FPL-22

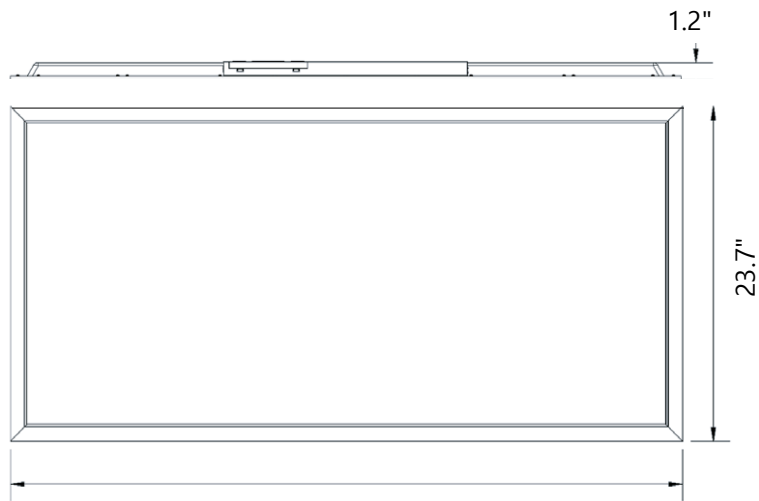

FPL-24

Accessories



Suspension Kit



Surface mounting Kit