



LWS series

Linear Wraparound Strip light
Selectable Power and CCT
Voltage input 120V-347V

Description

The LWS series linear wrap light features field selectable lumen output and colour temperature. The fixture easily mounts on ceilings individually or connected to end-to-end for continuous runs. The fixture features a 5-inch wide curved diffuser that provides comfortable diffused light and a modern aesthetic appeal for commercial and industrial ambient lighting applications

Order Information


Example: LWS-4-SW-3CCT

Model	Lenght	Power (Seletable) SW	CCT (Seletable) 3 CCT
LWS	4		
LWS	4 Feet	32W/3936lm 40W/4920lm 48W/5904lm	3500K 4000K 5000K



Specifications

- **Input Voltage:** Universal 120-347V, 60Hz
- **Selectable Power Output:** 34-90W
- **Selectable CCT:** 3000K/4000K/5000K
- **Efficacy:** 120 LPW Nominal*
- **CRI:** >85
- **Beam Angle:** 120°
- **THD:** <20%
- **IP Grade:** IP20
- **Efficacy:** 123lm/W
- **Driver:** Flicker-free
- **Dimming Range:** 0-10V, 1%-100%
- **Listing:** cULus
- **Qualification:** DLC
- **Compliance:** CE,FCC, RoHS
- **Housing:** Painted cold rolled steel
- **Optics:** Frosted PMMA lens
- **Location:** Indoor, IP54 rated
- **Operating Temperature:** -20~ +45°C
- **Warranty:** 5 years

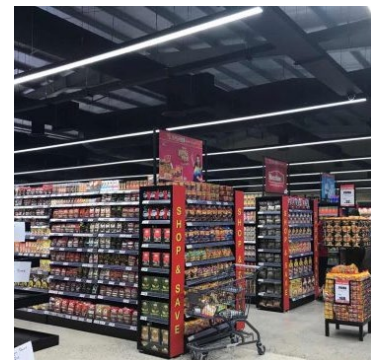

* Efficacy varies with CCT and power output. The actual efficacy is ±8% of the nominal LPW

** Complete warranty items located at www.vyvydlighting.ca/warranty



Project Name :
Location :
Quantity :
Date :
Note :

LWS series Linear Wraparound Strip light

Dimensions

